

# VICONIC HEALTH ACOUSTICAL PERFORMANCE TEST REPORT

## SCOPE OF WORK

ASTM E90, ASTM E492, AND ASTM E2179 TESTING ON 5.5 MM CARPET TILE OVER 11 MM VICONIC SAFETY FLOORING™ UNDERLAYMENT

## SPECIMEN TYPE

Concrete Slab - 152 mm

## REPORT NUMBER

N6747.06-113-11-R0

## TEST DATE

05/01/22

## ISSUE DATE

05/06/22

## RECORD RETENTION END

05/01/26


## PAGES

17

## DOCUMENT CONTROL

RTTDS-R-AMER-Test-2844 (03/23/22)

© 2017 INTERTEK

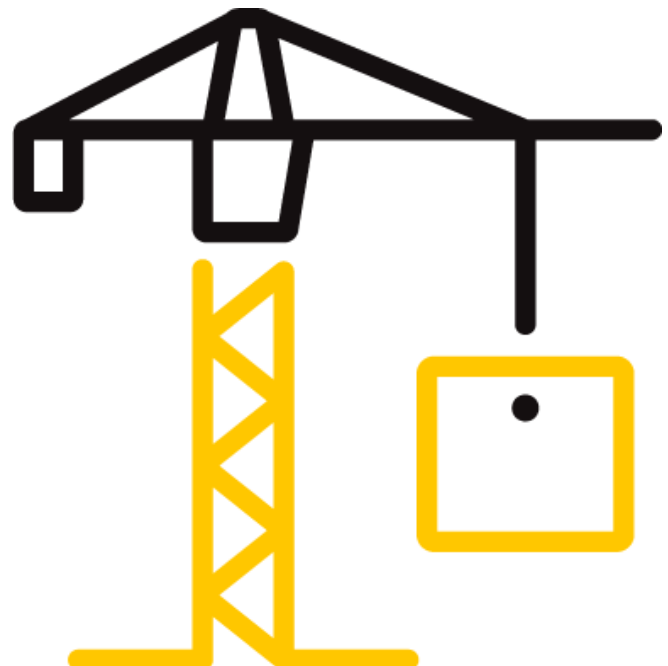

## TEST REPORT FOR VICONIC HEALTH

Report No.: N6747.06-113-11-R0

Date: 05/06/22

### REPORT ISSUED TO

#### VICONIC HEALTH

1100 Oakwood Boulevard  
Dearborn, Michigan 48124

### SECTION 1

#### SCOPE

Architectural Testing, Inc. (an Intertek company) dba Intertek Building & Construction (B&C) was contracted by Viconic Health to perform testing in accordance with ASTM E90, ASTM E492, AND ASTM E2179 on 5.5 mm Carpet Tile over 11 mm VICONIC SAFETY FLOORING™ Underlayment. Results obtained are tested values and were secured by using the designated test methods. Testing was conducted in the VT test chambers at Intertek B&C located in York, Pennsylvania.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory.

### SECTION 2

#### SUMMARY OF TEST RESULTS

<b>DATA FILE NO.</b>	N6747.02
<b>SERIES/MODEL:</b>	5.5 mm Carpet Tile over 11 mm VICONIC SAFETY FLOORING™ Underlayment
<b>STC</b>	51
<b>IIC</b>	63
<b>ΔIIC</b>	29
<b>HIIC</b>	73
<b>ΔHIIC</b>	44

**COMPLETED BY:** Morgan S. J. Kennedy  
Technician - Acoustical  
**TITLE:** Testing

**SIGNATURE:**

**DATE:** 05/06/22

**COMPLETED BY:** Daniel B. Mohler  
Project Lead - Acoustical  
**TITLE:** Testing

**SIGNATURE:**

**DATE:** 05/06/22

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



**TEST REPORT FOR VICONIC HEALTH**

Report No.: N6747.06-113-11-R0

Date: 05/06/22

**SECTION 3****TEST METHODS**

The specimen was evaluated in accordance with the following:

**ASTM E90-09 (2016)**, *Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions*

**ASTM E413-16**, *Classification for Rating Sound Insulation*

**ASTM E492-09(2016)e1**, *Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine*

**ASTM E2179-21**, *Standard Test Method for Laboratory Measurement of the Effectiveness of Floor Coverings in Reducing Impact Sound Transmission Through Concrete Floors*

**ASTM E989-21**, *Classification for Determination of Impact Insulation Class (IIC)*

**ASTM E2235-04 (2020)**, *Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods*

**ASTM E3222-20**, *Standard Classification for Determination of High-Frequency Impact Sound Ratings*

**SECTION 4****MATERIAL SOURCE/INSTALLATION**

The full test specimen was assembled on the day of testing by B&C. All materials provided by the client were installed on an existing B&C assembly (Concrete Slab - 152 mm) utilizing B&C-supplied materials. The assembly was installed in a steel test frame which was installed into the opening between the source and receive rooms in the test chamber. The test frame was isolated from the structure with dense neoprene gasket.

The total weight of the floor/ceiling assembly was 4077.3 kg. B&C will store samples of the test specimen for four years. Photographs of the test specimen are included in the report. A drawing of the test specimen is included in the report.

B&C will service this report for the entire test record retention period. Test records, such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation, will be retained by B&C for the entire test record retention period.

Unless differently required, Intertek reports apply the "Simple Acceptance" rule, also called "Shared Risk approach," of ILAC-G8:09/2019, Guidelines on Decision Rules and Statements of Conformity.

## TEST REPORT FOR VICONIC HEALTH

Report No.: N6747.06-113-11-R0

Date: 05/06/22

### SECTION 5 EQUIPMENT

INSTRUMENT	MANUFACTURER	MODEL	DESCRIPTION	ASSET #	CAL DATE	
2-Channel Analog Input	National Instruments	NI 9250	2-Channel Analog Input	INT02572	05/21	*
2-Channel Analog Input	National Instruments	NI 9250	2-Channel Analog Input	INT02574	05/21	*
2-Channel Analog Input	National Instruments	NI 9250	2-Channel Analog Input	INT02575	05/21	*
2-Channel Analog Input	National Instruments	NI 9250	2-Channel Analog Input	INT02576	05/21	*
2-Channel Analog Input	National Instruments	NI 9250	2-Channel Analog Input	INT02577	05/21	*
2-Channel Analog Input	National Instruments	NI 9250	2-Channel Analog Input	INT02578	05/21	*
2-Channel Analog Output	National Instruments	NI 9260	2-Channel Analog Input	INT02573	05/21	*
Microphone Calibrator	Norsonic	34093	Acoustical Calibrator	65105	10/21	
Receive Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	63745	09/21	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63747	07/21	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	64340	10/21	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63744	09/21	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	65968	01/22	
Receive Room Environmental Indicator	Comet	T7510	Temperature and Humidity Transmitter	63810	10/21	
				63811	10/21	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	65103	02/22	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	64902	12/21	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	63741	07/21	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	63742	04/22	
Source Room Microphone	PCB Electronics	378C20	Microphone and Preamplifier	64906	04/22	
Source Room Environmental Indicator	Comet	T7510	Temperature and Humidity Transmitter	63812	10/21	
Tapping Machine	Norsonic	Nor277	Tapping Machine	INT00936	02/22	

\* The calibration frequency for this equipment is every two years per the manufacturer's recommendation.

VT RECEIVE ROOM VOLUME	158.86 m <sup>3</sup>
VT SOURCE ROOM VOLUME	190 m <sup>3</sup>

### SECTION 6 LIST OF OFFICIAL OBSERVERS

NAME	COMPANY
Michael A. Unnone	Intertek B&C
Daniel B. Mohler	Intertek B&C

## **TEST REPORT FOR VICONIC HEALTH**

Report No.: N6747.06-113-11-R0

Date: 05/06/22

### **SECTION 7**

#### **TEST PROCEDURE**

The microphones were calibrated before conducting the tests. The air temperature and relative humidity conditions were monitored and recorded during all measurements. The average temperature and humidity of both the source and receive rooms are listed in Sections 10 and 11. The maximum and minimum temperatures and humidities of the receive room from the duration of the test are listed in Sections 12 through 15.

The airborne transmission loss test was conducted in accordance with the ASTM E90 test method using the single direction method. Two background noise sound pressure level and five sound absorption measurements were conducted at each of five microphone positions. Two sound pressure level measurements were made simultaneously in both rooms, at each of five microphone positions.

The impact sound transmission test was conducted in accordance with the ASTM E492 test method. Two background noise sound pressure level, two sound pressure level measurements with the tapping machine operating at each position specified by ASTM E492, and five sound absorption measurements were conducted at each of five microphone positions.

The delta impact insulation test was conducted in accordance with ASTM E2179 test method. In addition to the impact sound transmission test, two sound pressure level measurements with the tapping machine operating at each position specified by ASTM E492 with only the concrete slab installed were conducted at each of five microphone positions.

The details of this construction are noted as proprietary per the customer's request. Reference should be made to Intertek-ATI Report N6747.02-113-11 for detailed information on the specific construction.

Detailed test procedures, data for flanking limit tests, repeatability measurements, and reference specimen tests are available upon request.

### **SECTION 8**

#### **TEST CALCULATIONS**

The STC (Sound Transmission Class), IIC (Impact Insulation Class), HIIC (High-Frequency Impact Insulation Class), and  $\Delta$ IIC (Delta Impact Insulation Class) ratings were calculated in accordance with ASTM E413, ASTM E989, ASTM E3222, and ASTM E2179, respectively.

## TEST REPORT FOR VICONIC HEALTH

Report No.: N6747.06-113-11-R0

Date: 05/06/22

### SECTION 9

#### TEST SPECIMEN DESCRIPTION

MATERIAL	DIMENSIONS (mm)	THICKNESS (mm)	MANUFACTURER AND SERIES	QUANTITY	AVERAGE WEIGHT
Carpet Tile	914.4 by 228.6	5.5	N/A	10.98 m <sup>2</sup>	3.08 kg/m <sup>2</sup>
	Note: Adhered to the underlayment with the manufacturer's adhesive using a 0.79 mm by 1.59 mm by 0.79 mm trowel. Adhesive was allowed to cure per manufacturer's specifications.				
Underlayment	774.7 by 1524	11.0	VICONIC SAFETY FLOORING™	10.98 m <sup>2</sup>	2.1 kg/m <sup>2</sup>
	Note: Loose laid				
Concrete Slab	3023 by 3632	152.4	5000 PSI	10.98 m <sup>2</sup>	366.18 kg/m <sup>2</sup>
	Note: Installed in a test frame flush to the source room. Mats of #5 reinforcing bars were placed 25.4 mm from both the top and bottom of the slab, with bars spaced on 305 mm centers in both directions. No noticeable shrinkage or cracking was visible on the specimen.				

# TEST REPORT FOR VICONIC HEALTH

Report No.: N6747.06-113-11-R0

Date: 05/06/22

## SECTION 10

### TEST RESULTS - AIRBORNE SOUND TRANSMISSION LOSS



TEST DATE	5/1/2022				
DATA FILE NO.	N6747.02				
CLIENT	Viconic Health				
DESCRIPTION	5.5 mm Carpet Tile, 11 mm VICONIC SAFETY FLOORING™ Underlayment, 152.4 mm 5000 PSI Concrete Slab				
SPECIMEN AREA	10.98 m <sup>2</sup>	Receive Temp.	16°C	Source Temp.	16.9°C
TECHNICIAN	MAU	Receive Humidity	55%	Source Humidity	55%

FREQ (Hz)	BACKGROUND SPL (dB)	ABSORPTION m <sup>2</sup>	SOURCE SPL (dB)	RECEIVE SPL (dB)	SPECIMEN TL (dB)	95% SAMPLING LIMIT	NUMBER OF DEFICIENCIES
50	30.4	22.7	109	68	38	3.8	-
63	29.6	17.2	105	67	38	5.4	-
80	30.1	15.3	101	68	32	3.6	-
100	28.8	10.4	98	64	36	2.0	-
125	26.1	9.0	100	62	40	2.6	0
160	18.1	8.9	97	61	38	1.3	0
200	20.1	9.8	94	56	39	1.3	2
250	14.3	9.3	97	54	44	0.9	0
315	14.1	10.1	100	57	42	1.1	5
400	13.9	8.9	99	58	42	0.8	8
500	13.2	8.2	96	50	48	0.8	3
630	16.3	7.9	97	45	53	0.7	0
800	16.4	8.0	96	39	59	0.7	0
1000	16.6	7.9	96	36	61	0.7	0
1250	15.4	8.0	96	33	64	0.5	0
1600	13.6	8.2	96	35	63	0.4	0
2000	12.3	9.1	95	31	66	0.5	0
2500	10.9	10.3	91	25	68	0.4	0
3150	9.2	11.2	91	21	70	0.5	0
4000	8.2	12.9	91	18	73	0.6	0
5000	8.2	14.9	88	12	76	0.6	-
6300	8.6	18.6	86	8	76	1.2	-
8000	9.1	23.9	86	8	75	1.5	-
10000	9.4	23.9	84	8	73	1.9	-
STC Rating	51	(Sound Transmission Class)			Sum of Deficiencies	18	

- Notes:
- 1) Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.
  - 2) Specimen TL levels listed in red are potentially limited by the laboratory flanking limit.
  - 3) Specimen TL levels listed in blue indicate the lower limit of the transmission loss.
  - 4) Specimen TL levels listed in green indicate that there has been a filler wall correction applied

**TEST REPORT FOR VICONIC HEALTH**

Report No.: N6747.06-113-11-R0


Date: 05/06/22

**SECTION 11**

**TEST RESULTS - AIRBORNE SOUND TRANSMISSION LOSS GRAPH**



<b>TEST DATE</b>	5/1/2022				
<b>DATA FILE NO.</b>	N6747.02				
<b>CLIENT</b>	Viconic Health				
<b>DESCRIPTION</b>	5.5 mm Carpet Tile, 11 mm VICONIC SAFETY FLOORING™ Underlayment, 152.4 mm 5000 PSI Concrete Slab				
<b>SPECIMEN AREA</b>	10.98 m <sup>2</sup>	<b>Receive Temp.</b>	16°C	<b>Source Temp.</b>	16.9°C
<b>TECHNICIAN</b>	MAU	<b>Receive Humidity</b>	55%	<b>Source Humidity</b>	55%

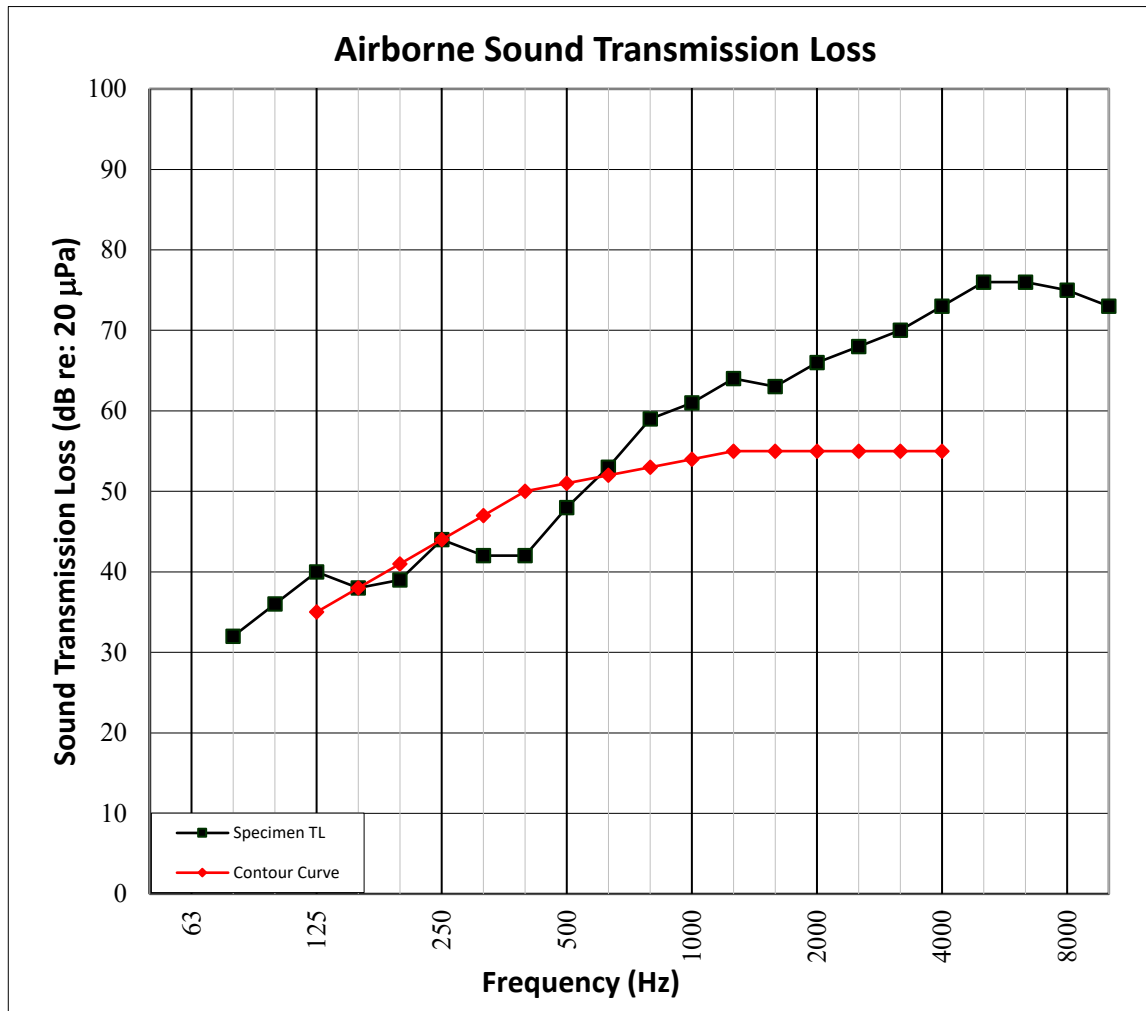



# TEST REPORT FOR VICONIC HEALTH

Report No.: N6747.06-113-11-R0

Date: 05/06/22

## SECTION 12

### TEST RESULTS - IMPACT SOUND TRANSMISSION



TEST DATE	5/1/2022				
DATA FILE NO.	N6747.02				
CLIENT	Viconic Health				
DESCRIPTION	5.5 mm Carpet Tile, 11 mm VICONIC SAFETY FLOORING™ Underlayment, 152.4 mm 5000 PSI Concrete Slab				
SPECIMEN AREA	10.98 m <sup>2</sup>	Maximum Temp.	16°C	Minimum Temp.	16°C
TECHNICIAN	MAU	Max. Humidity	55%	Min. Humidity	54%

FREQ (Hz)	BACKGROUND SPL (dB)	ABSORPTION m <sup>2</sup>	NORMALIZED IMPACT SPL (dB)	95% SAMPLING LIMIT	NUMBER OF DEFICIENCIES
80	26.2	15.1	54	2.6	-
100	23.0	11.5	55	1.1	6
125	20.4	8.2	54	1.2	5
160	17.0	8.9	55	0.8	6
200	15.7	9.4	57	0.9	8
250	11.8	9.6	51	0.6	2
315	13.1	9.9	47	0.5	0
400	10.9	8.9	45	0.6	0
500	10.4	8.0	41	0.4	0
630	13.9	7.7	36	0.3	0
800	14.7	8.1	34	0.5	0
1000	14.4	7.8	30	0.4	0
1250	13.3	7.9	29	0.4	0
1600	11.5	8.1	28	0.4	0
2000	10.7	9.2	27	0.5	0
2500	9.4	10.1	25	0.6	0
3150	8.0	11.4	19	0.6	0
4000	7.6	13.0	14	0.7	-
5000	7.8	14.8	10	0.7	-
6300	8.5	18.6	10	0.8	-
8000	9.1	23.9	11	0.8	-
10000	9.4	23.9	11	0.9	-
IIC Rating	63	(Impact Insulation Class)		Sum of Deficiencies	27

**Notes:** Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.

**TEST REPORT FOR VICONIC HEALTH**

Report No.: N6747.06-113-11-R0


Date: 05/06/22

**SECTION 13**

**TEST RESULTS - IMPACT SOUND TRANSMISSION GRAPH**



<b>TEST DATE</b>	5/1/2022				
<b>DATA FILE NO.</b>	N6747.02				
<b>CLIENT</b>	Viconic Health				
<b>DESCRIPTION</b>	5.5 mm Carpet Tile, 11 mm VICONIC SAFETY FLOORING™ Underlayment, 152.4 mm 5000 PSI Concrete Slab				
<b>SPECIMEN AREA</b>	10.98 m <sup>2</sup>	<b>Maximum Temp.</b>	16°C	<b>Minimum Temp.</b>	16°C
<b>TECHNICIAN</b>	MAU	<b>Max. Humidity</b>	55%	<b>Min. Humidity</b>	54%

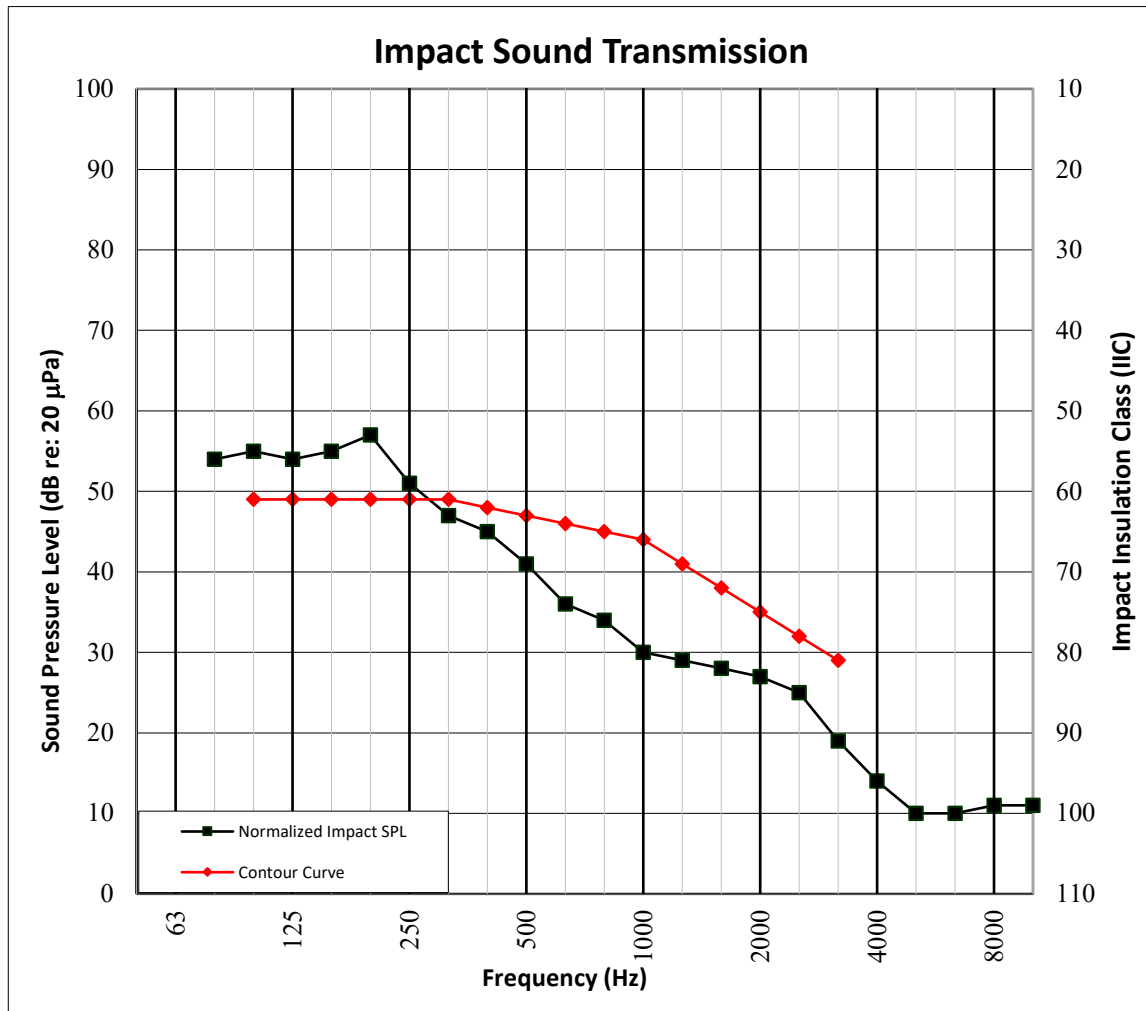

# TEST REPORT FOR VICONIC HEALTH

Report No.: N6747.06-113-11-R0

Date: 05/06/22

## SECTION 14

### TEST RESULTS - HIGH-FREQUENCY IMPACT SOUND TRANSMISSION



TEST DATE	5/1/2022				
DATA FILE NO.	N6747.02				
CLIENT	Viconic Health				
DESCRIPTION	5.5 mm Carpet Tile, 11 mm VICONIC SAFETY FLOORING™ Underlayment, 152.4 mm 5000 PSI Concrete Slab				
SPECIMEN AREA	10.98 m <sup>2</sup>	Maximum Temp.	16°C	Minimum Temp.	16°C
TECHNICIAN	MAU	Max. Humidity	55%	Min. Humidity	54%

FREQ (Hz)	BACKGROUND SPL (dB)	ABSORPTION m <sup>2</sup>	NORMALIZED IMPACT SPL (dB)	95% SAMPLE CONFIDENCE LIMIT	NUMBER OF DEFICIENCIES
400	10.9	8.9	45	0.6	6.5
500	10.4	8.0	41	0.4	4.1
630	13.9	7.7	36	0.3	0.0
800	14.7	8.1	34	0.5	0.0
1000	14.4	7.8	30	0.4	0.0
1250	13.3	7.9	29	0.4	0.0
1600	11.5	8.1	28	0.4	0.0
2000	10.7	9.2	27	0.5	2.1
2500	9.4	10.1	25	0.6	3.2
3150	8.0	11.4	19	0.6	0.0
HIIC Rating	73	(High-Frequency Impact Insulation Class)		Sum of Deficiencies	15.9

**Notes:** Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.

**TEST REPORT FOR VICONIC HEALTH**

Report No.: N6747.06-113-11-R0


Date: 05/06/22

**SECTION 15**

**TEST RESULTS - HIGH-FREQUENCY IMPACT SOUND TRANSMISSION GRAPH**



<b>TEST DATE</b>	5/1/2022				
<b>DATA FILE NO.</b>	N6747.02				
<b>CLIENT</b>	Viconic Health				
<b>DESCRIPTION</b>	5.5 mm Carpet Tile, 11 mm VICONIC SAFETY FLOORING™ Underlayment, 152.4 mm 5000 PSI Concrete Slab				
<b>SPECIMEN AREA</b>	10.98 m <sup>2</sup>	<b>Maximum Temp.</b>	16°C	<b>Minimum Temp.</b>	16°C
<b>TECHNICIAN</b>	MAU	<b>Max. Humidity</b>	55%	<b>Min. Humidity</b>	54%

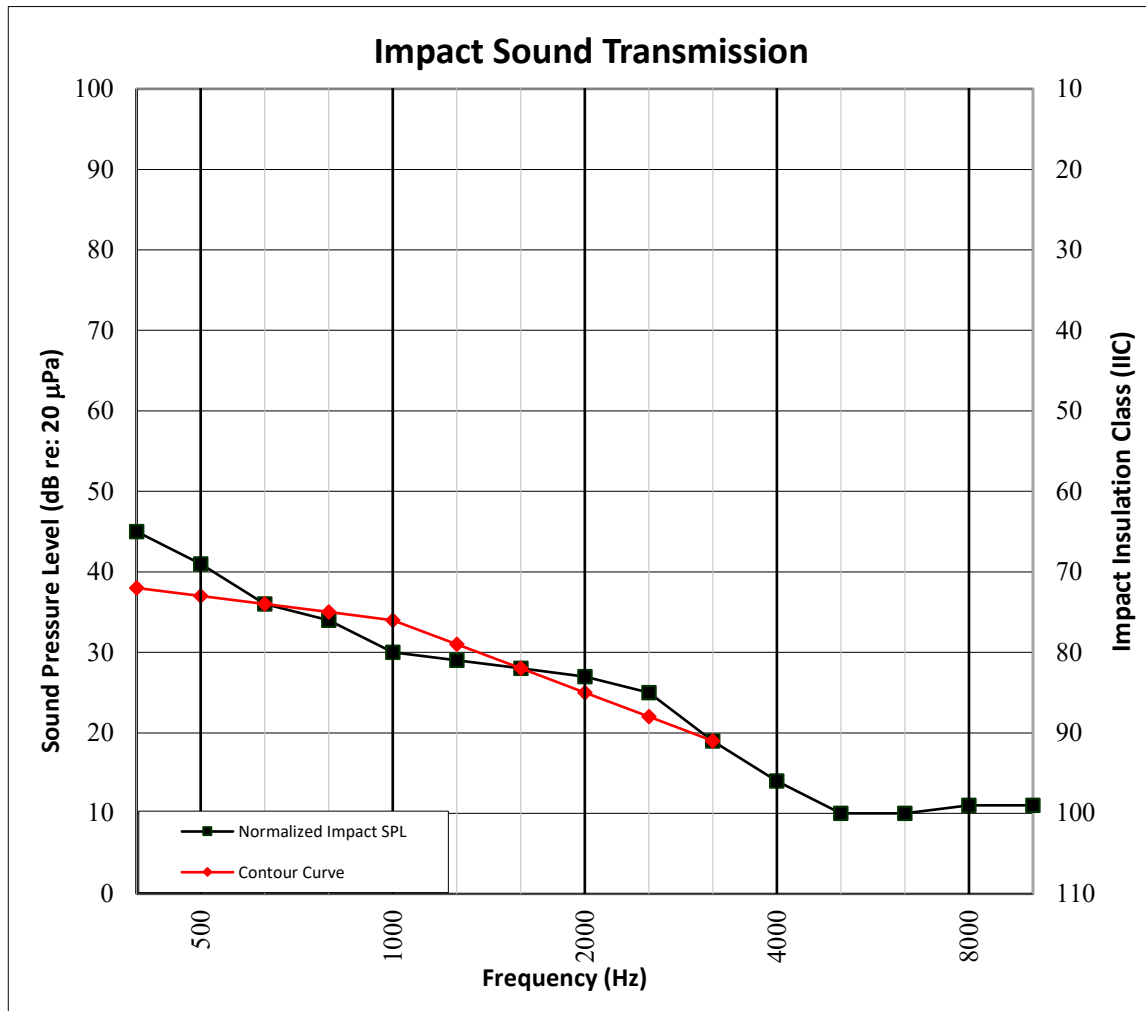

## TEST REPORT FOR VICONIC HEALTH

Report No.: N6747.06-113-11-R0

Date: 05/06/22

### SECTION 16

#### TEST RESULTS - DELTA IMPACT INSULATION



TEST DATE	5/1/2022				
DATA FILE NO.	N6747.02				
CLIENT	Viconic Health				
DESCRIPTION	5.5 mm Carpet Tile, 11 mm VICONIC SAFETY FLOORING™ Underlayment, 152.4 mm 5000 PSI Concrete Slab				
SPECIMEN AREA	10.98 m <sup>2</sup>	Maximum Temp.	16°C	Minimum Temp.	16°C
TECHNICIAN	MAU	Max. Humidity	55%	Min. Humidity	54%

FREQ (Hz)	BACKGROUND SPL (dB)	ABSORPTION m <sup>2</sup>	NORMALIZED IMPACT SPL BARE (dB)	95% CONF LIMIT	NORMALIZED IMPACT SPL SPEC (dB)	95% SAMPL LIMIT	RESULT ARRAY L <sub>ref,c</sub>	NUMBER OF DEFICIENCIES
100	23.0	11.5	58.7	1.7	54.6	1.4	63.0	8
125	20.4	8.2	59.1	1.3	54.1	1.5	63.0	8
160	17.0	8.9	62.6	0.9	55.4	0.9	61.0	6
200	15.7	9.4	67.0	0.9	57.1	1.1	59.0	4
250	11.8	9.6	66.0	0.5	51.0	0.7	54.0	0
315	13.1	9.9	67.6	0.6	46.8	0.7	49.0	0
400	10.9	8.9	68.2	0.5	44.5	0.7	46.0	0
500	10.4	8.0	68.1	0.5	41.1	0.5	44.0	0
630	13.9	7.7	69.3	0.4	36.0	0.4	38.0	0
800	14.7	8.1	71.1	0.6	34.0	0.7	34.0	0
1000	14.4	7.8	70.7	0.6	30.4	0.5	32.0	0
1250	13.3	7.9	71.0	0.5	29.0	0.5	30.0	0
1600	11.5	8.1	71.3	0.5	27.8	0.5	28.0	0
2000	10.7	9.2	71.3	0.6	27.1	0.6	28.0	0
2500	9.4	10.1	71.3	0.8	25.2	0.7	26.0	0
3150	8.0	11.4	70.2	0.8	18.9	0.7	21.0	0
ΔIIC Rating	29	(Delta Impact Insulation Class)				Sum of Deficiencies	26	
ΔHIIC Rating	44	(Delta High-Frequency Impact Insulation Class)				Sum of Deficiencies	20	

**Notes:** Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.

## TEST REPORT FOR VICONIC HEALTH

Report No.: N6747.06-113-11-R0


Date: 05/06/22

### SECTION 17

#### TEST RESULTS - DELTA IMPACT INSULATION GRAPH



TEST DATE	5/1/2022				
DATA FILE NO.	N6747.02				
CLIENT	Viconic Health				
DESCRIPTION	5.5 mm Carpet Tile, 11 mm VICONIC SAFETY FLOORING™ Underlayment, 152.4 mm 5000 PSI Concrete Slab				
SPECIMEN AREA	10.98 m <sup>2</sup>	Maximum Temp.	16°C	Minimum Temp.	16°C
TECHNICIAN	MAU	Max. Humidity	55%	Min. Humidity	54%

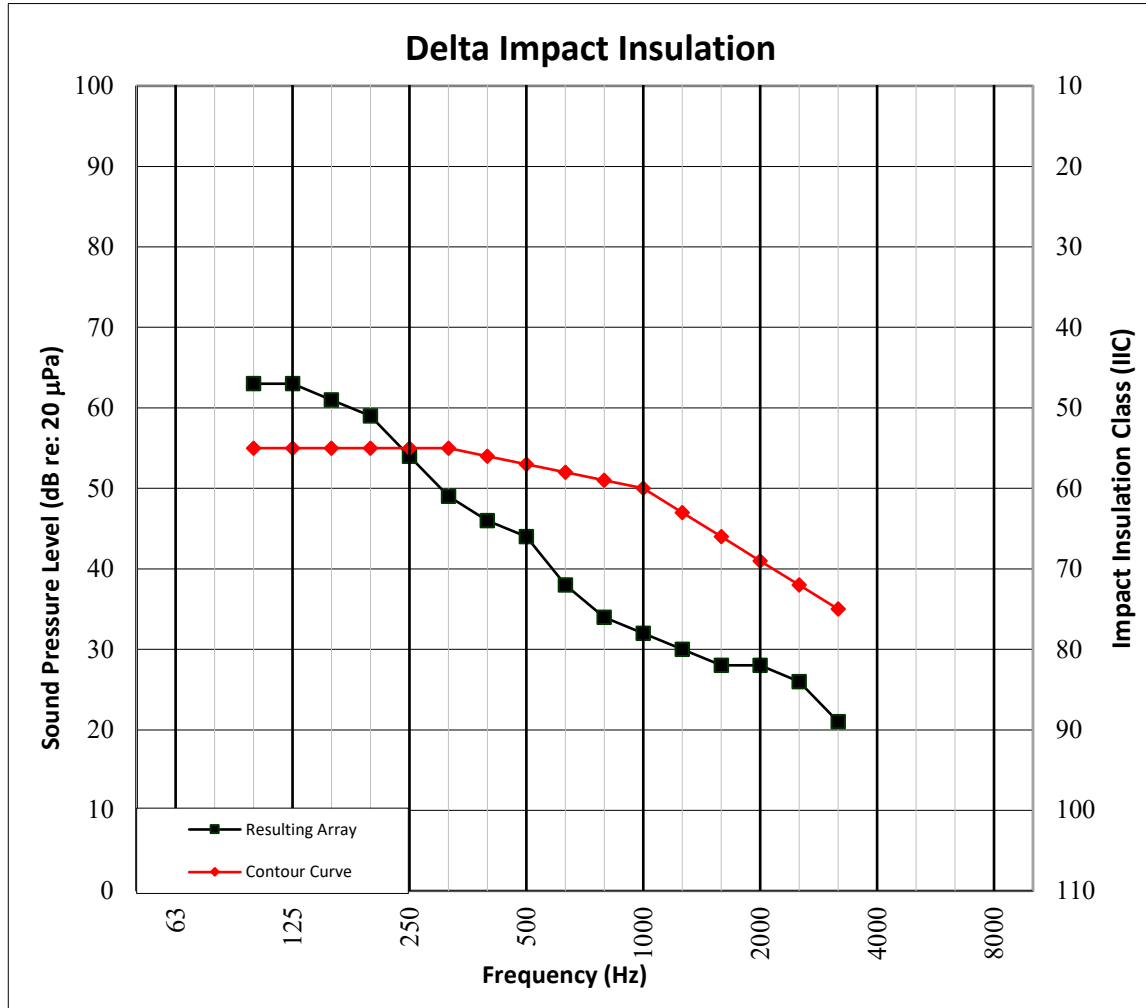

**TEST REPORT FOR VICONIC HEALTH**

Report No.: N6747.06-113-11-R0

Date: 05/06/22

**SECTION 18**

**PHOTOGRAPHS**



**Photo No. 1**

**Source Room View of Test Specimen Installation**



**Photo No. 2**

**Receive Room View of Test Specimen Installation**


**TEST REPORT FOR VICONIC HEALTH**

Report No.: N6747.06-113-11-R0

Date: 05/06/22

**SECTION 19**

**DRAWING**

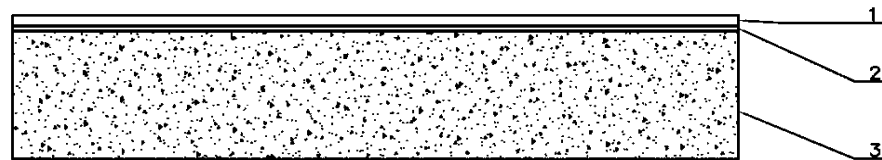

- 1-Floor Topping
- 2-Underlayment
- 3-Concrete Slab





Total Quality. Assured.

130 Derry Court  
York, PA 17406

Telephone: 717-764-7700  
Facsimile: 717-764-4129  
[www.intertek.com/building](http://www.intertek.com/building)

## TEST REPORT FOR VICONIC HEALTH

Report No.: N6747.06-113-11-R0

Date: 05/06/22

### SECTION 20

#### REVISION LOG

REVISION #	DATE	PAGES	DESCRIPTION
R0	05/06/22	N/A	Original Report Issue